


120 Series

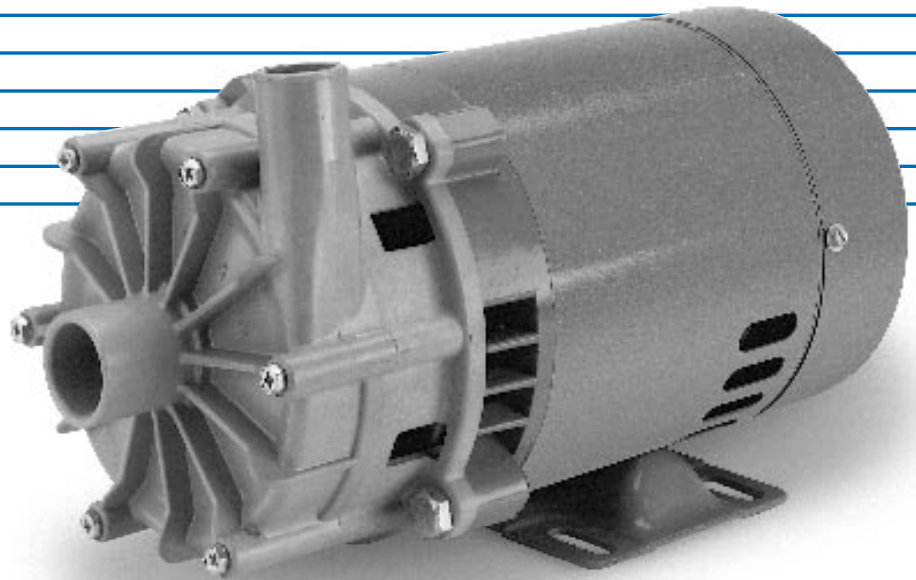

Pump Specifications:

Flow Rates — Range to 40 gpm;
maximum head
50 feet

Motor — 115/230V, 50/60 Hz
1/3 hp, open,
drip-proof, capacitor
start, continuous
duty rated, thermally
protected


Fluid Temperature — To 220°F (104°C)

Materials in Contact with Solution:

Body — Noryl®
Suction I.D. - 15/16"
Discharge I.D. - 13/16"

Impellers — Noryl®

Seal — Carbon and
Ceramic faces
with Neoprene®
and Nitrile
elastomers

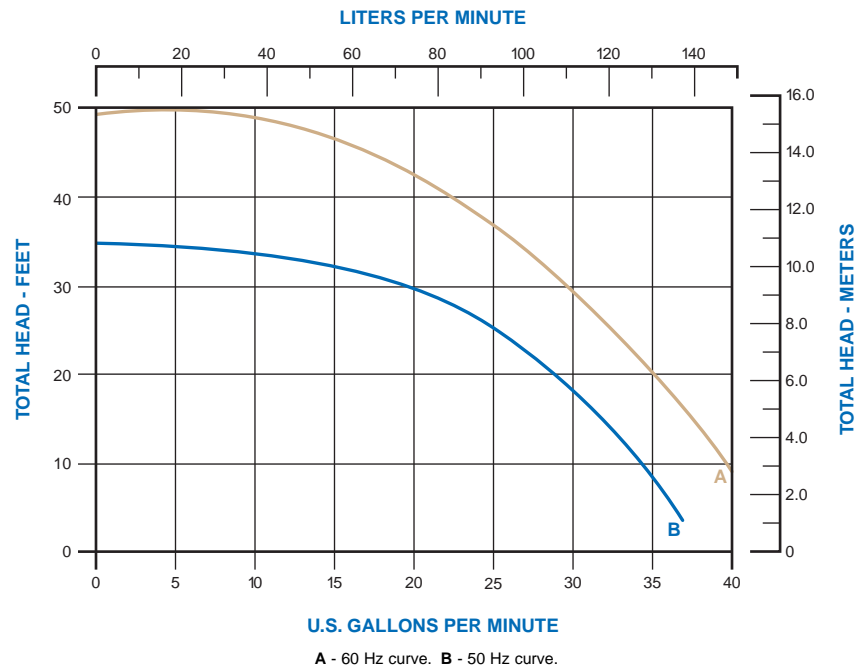


MODEL SPECIFICATIONS

Model Number	Series	Seal	Volts	Hz	Amps	Motor Type	Shell	Typical Curve		Approx. Wt.
								50 Hz	60 Hz	
12895-002	120	Mech	115/230	50/60	6.8/3.4	Cap. Start	Open D.P.	B	A	14.7 lbs.

CENTRIFUGAL PUMPS - TYPICAL DIMENSIONS

120 Series Model

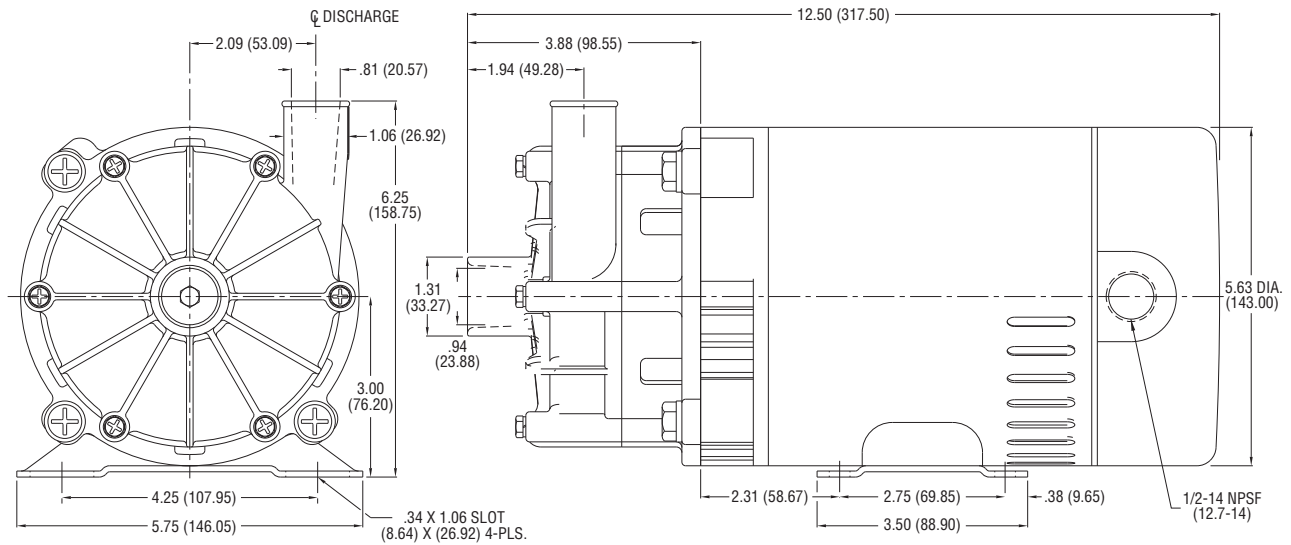


Dimensions in Inches
(Dimensions in Millimeters)

OEM
Options

Impellers — Two different diameter Noryl® impellers are available to provide greater performance ranges

- a. Noryl® with 316 Stainless Steel impeller shaft
- b. Noryl® with Brass impeller shaft

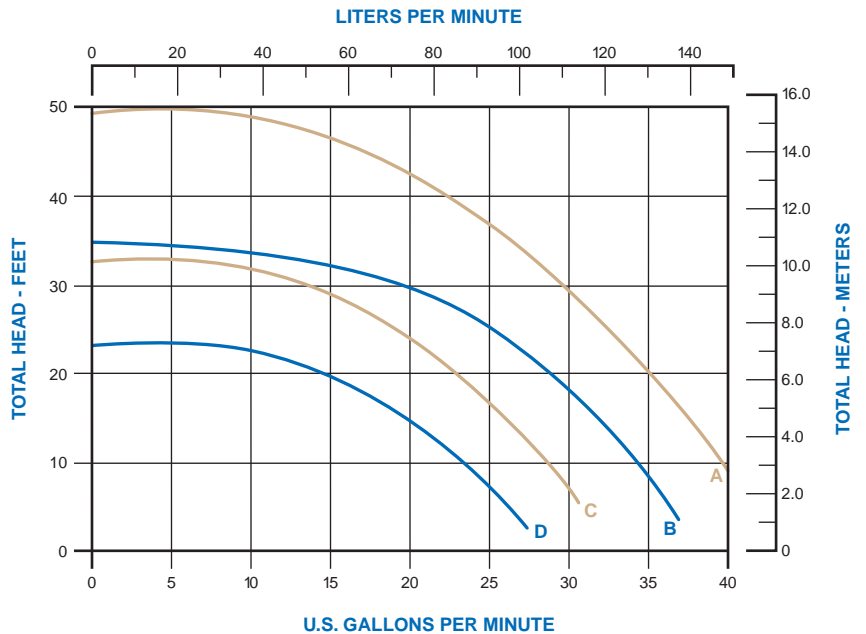

Curves A and B are with large impeller. A and C - 60 Hz curves. B and D - 50 Hz curves.