


2800 Series

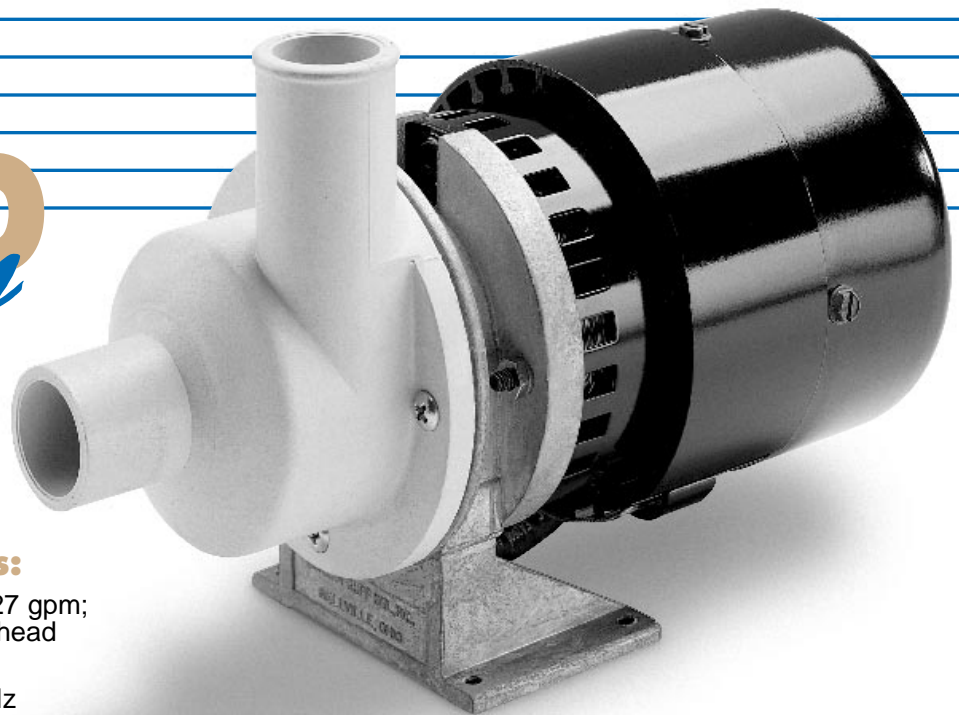

Pump Specifications:


Flow Rates — Range to 27 gpm;
maximum head
17 feet

Motor — 115V, 60 Hz
PSC

Fluid Temperature — To 220°F (104°C)

Materials in Contact with Solution:

Body — Noryl®
Impeller — Noryl®
Seal — Carbon and
Ceramic faces
with Butyl and
Nitrile elastomers

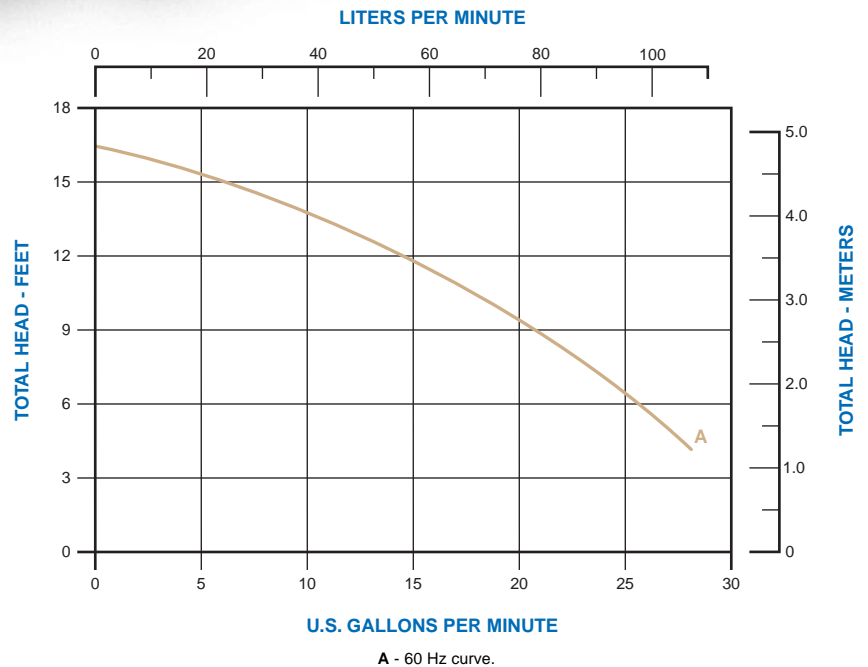


MODEL SPECIFICATIONS

| Model Number | Series | Seal | Volts | Hz | Amps | Motor Type | Shell | Typical Curve | | Approx. Wt. |
|--------------|--------|------|-------|----|------|------------|-------|---------------|-------|-------------|
| | | | | | | | | 50 Hz | 60 Hz | |
| 16675-001 | 2800 | Mech | 115 | 60 | 3.1 | SP | Open | — | A | 6.0 lbs. |

CENTRIFUGAL PUMPS - TYPICAL DIMENSIONS

2800 Series Model

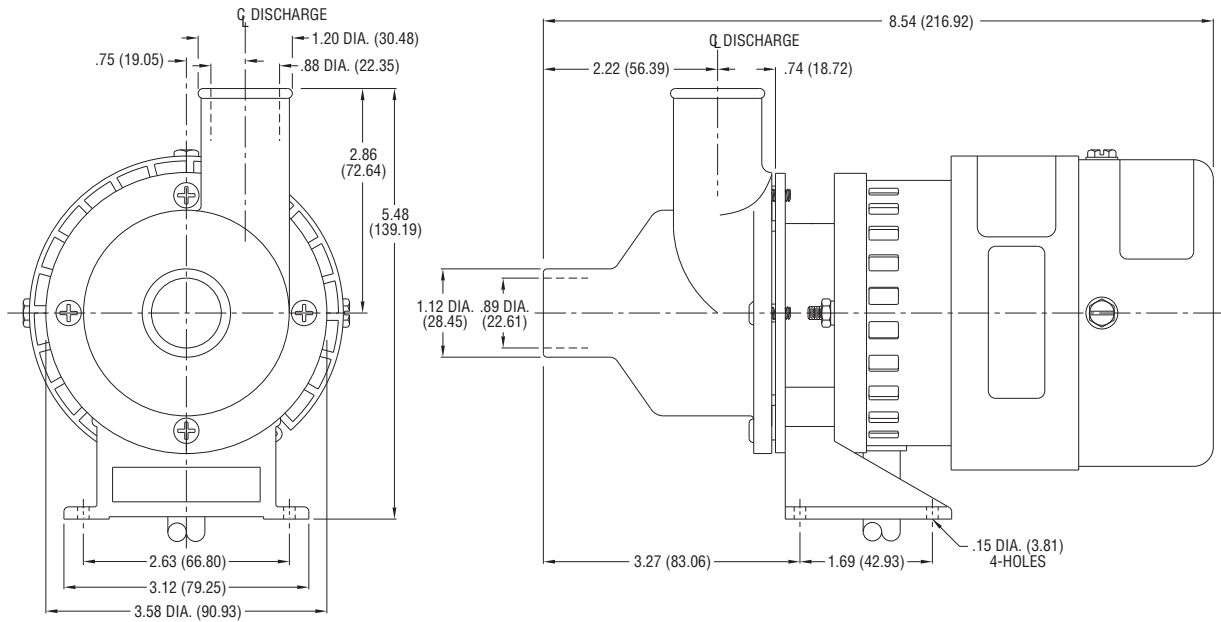

Dimensions in Inches
(Dimensions in Millimeters)

OEM Options

- Body** — Phenolic
- Impeller** — a. Phenolic
b. Polyethylene
- Seals** — a. Buna N lip seal
b. Carbon vs. 316 Stainless Steel mechanical seals with Brass, 302 Stainless Steel, and Polyethylene, Kel-F® or Butyl components
- Motors** — a. 230V, 50 Hz
b. 230V, 50/60 Hz
c. 230V, 60 Hz

